



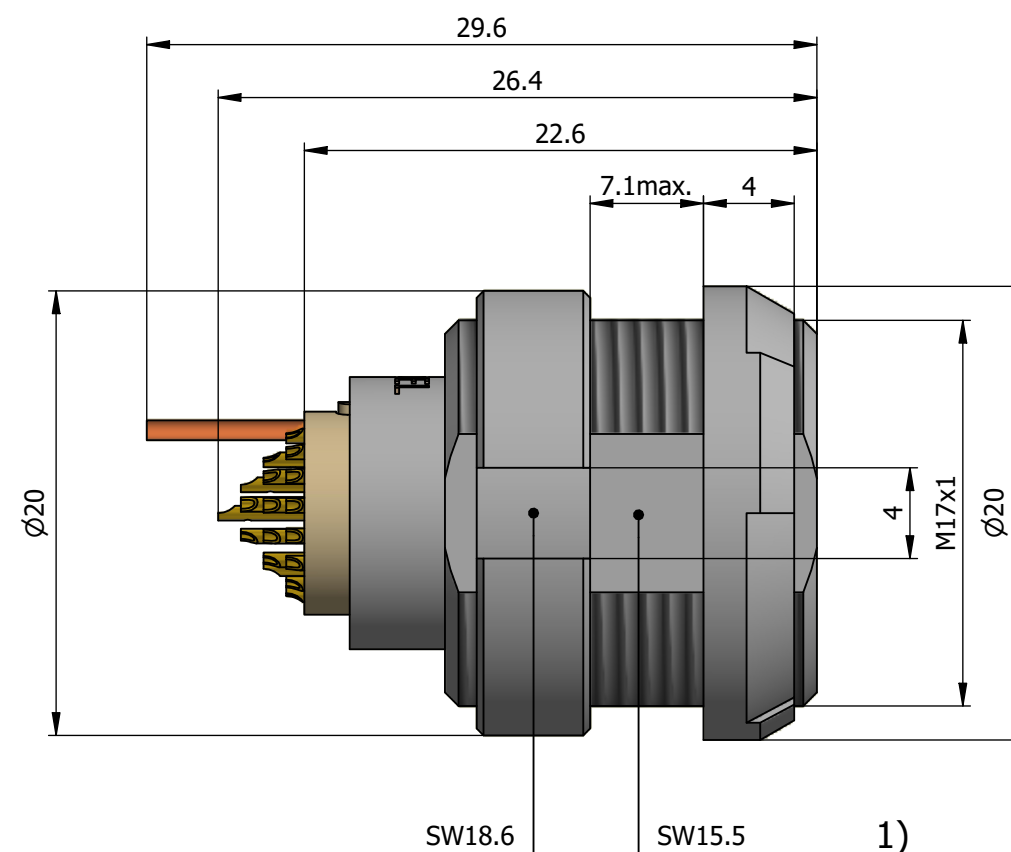


All dimensions are in millimeters (mm)

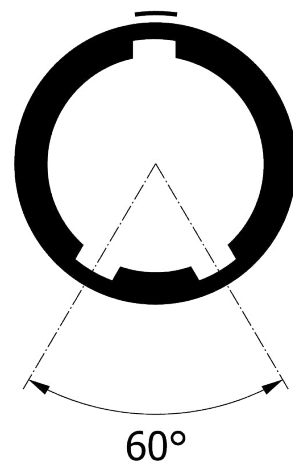


Recommended Panel Cut-Out




Mounting nut torque (Nm)
Plastic shell = 0.8

x Number of contacts

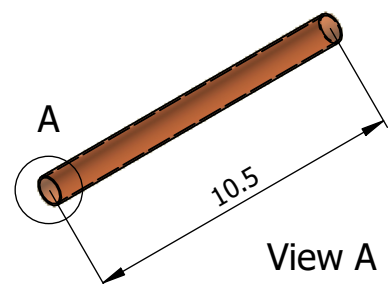

View A



x 1



Note:

1) This picture is generic and for illustrative purposes only, and may show different keying, materials, colour, finish, and contact configuration. Minor shape or feature variations to actual item may be present.

All additional information are documented on the datasheet (See below link or QR Code)
www.lemo.com/pdf/CKB.H34.SLWG.pdf



Fixed socket with two nuts (back panel mounting), PFA HV Contacts



REDEL

Redel SA
Rue du canal 2
1450 Ste-Croix - SWITZERLAND

Tel. (+41 24) 455 25 00
Fax. (+41 24) 455 25 01

CD

Drawn	01.07.2024	MARI / MAR
Checked	30.10.2024	OBAR
Modified	02	30.10.2024 / MAR
	DO NOT SCALE DRAWING	

CKB.H34.SLWG

Model Alignment Key Insert Config. Housing Insulator Contact Front Nut Color

CKB . H34 . SLWG