

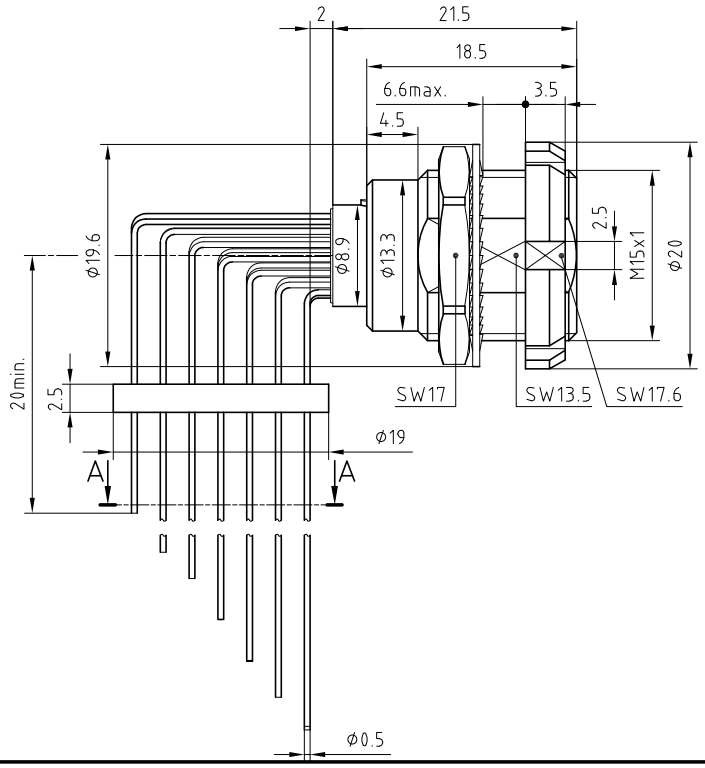

Outer shell	: Brass (UNS C38500)	Chrome plated (FS-QQ-C-320B)
Earthing crown	: Bronze (UNS C54400)	Nickel plated (FS-QQ-N-290A)
Insulator	: PEEK	-
Female contact	: Bronze (UNS C54400)	Gold plated (ISO 27874)
Notched nut	: Brass (UNS C38500)	Chrome plated (FS-QQ-C-320B)
Locking washer	: Bronze (UNS C52100)	Nickel plated (FS-QQ-N-290A)
Other metallic part	: Brass (UNS C38500)	Nickel plated (FS-QQ-N-290A)
Contact wire	: Brass (UNS C27400)	Tinned
Position insert	: POM	-

Panel cut-out



Torque for mounting nut : 6 Nm

A-A cross-section (PCB drilling pattern)

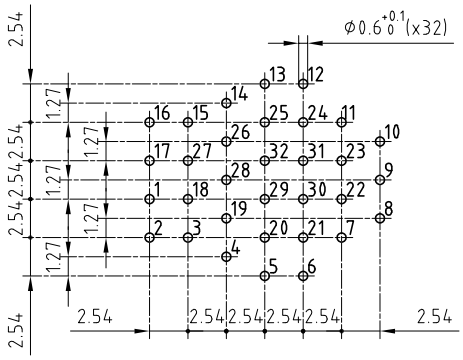

Spanner for notched nut : DCH.91.201.PA

Fixed socket , with two nuts , with key (G) , with elbow (90°) contact for PCB . (Back panel mounting) . Series 2B , multipole (32)

ETUDE N° E1406-E7218-E11233-E6218-E11020

Echelle			
—	Dessiné	12.08.2019	OVU / NHA
	Contrôle	12.08.2019	NHA / ATVI
	Modif.	00	12.08.2019/ OVU

LEMO SA
Chemin des Champs-Courbes 28
1024 Ecublens - SWITZERLAND
Tel. (+41 21) 695 16 00
email : info@lemo.com
www.lemo.com

ECG.2B.332.CLV