

L

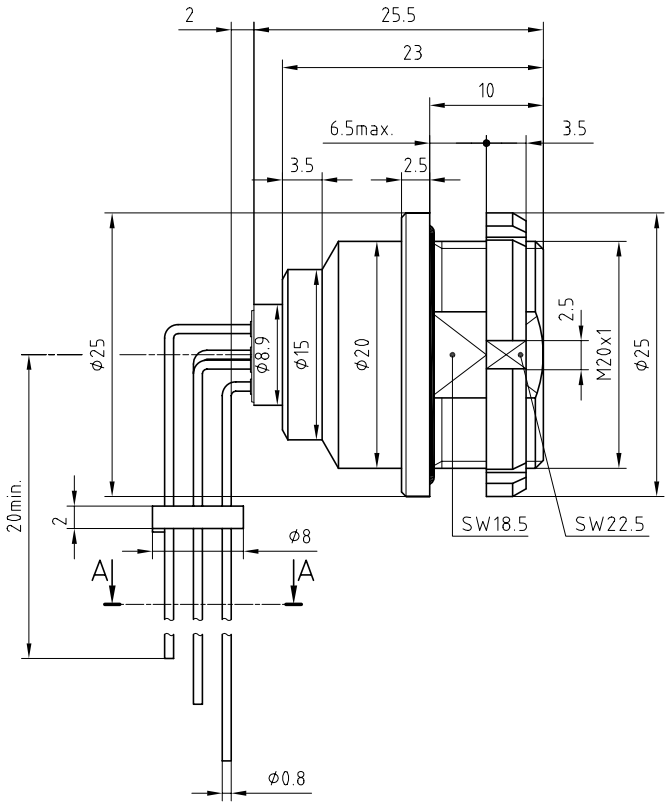

Outer shell	: Brass (UNS C38500)	Chrome plated (FS-QQ-C-320B)
Earthing crown	: Brass (UNS C38500)	Nickel plated (FS-QQ-N-290A)
Insulator	: PEEK	-
Male contact	: Brass (UNS C34500)	Gold plated (ISO 4523)
Clip	: Cu-Be (UNS C17200)	-
Notched nut	: Brass (UNS C38500)	Chrome plated (FS-QQ-C-320B)
Other metallic part	: Brass (UNS C38500)	Nickel plated (FS-QQ-N-290A)
O-rings	: Silicone (MVQ)	-
Contact wire	: Bronze (UNS C27400)	Tinned
Position insert	: FEP	-

Panel cut-out



Torque for mounting nut : 9 Nm

A-A cross-section (PCB drilling pattern)

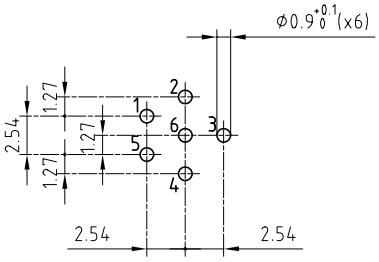

Spanner for notched nut : DCH.91.251.PA

Fixed socket , nut fixing , with keys (L) , with elbow (90°) contact for PCB . (Back panel mounting) . Series 2K , multipole (6)

ETUDE N°

Echelle			
—	Dessiné	02.06.06	OVU / RMO
	Contrôle	02.06.06	RMO / CDE
	Modif.	00	02.06.06 / OVU

LEMO SA CH-1024 Ecublens

EEL.2K.306.CLV