

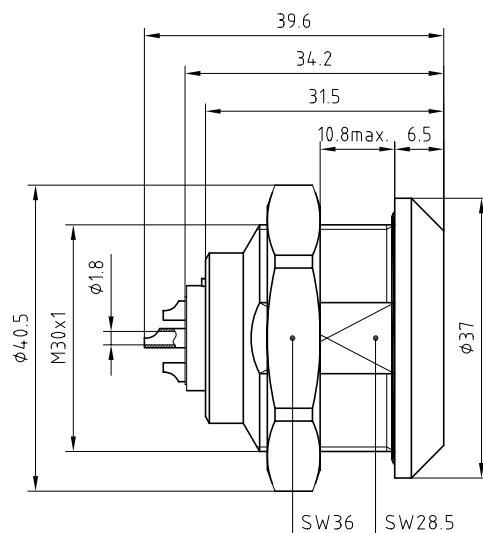




Outer shell	: Stainless steel (AISI303)	-
Earthing crown	: Brass (UNS C38500)	Nickel plated (FS-QQ-N-290A)
Insulator	: PEEK	-
Male contact	: Brass (UNS C38500)	Gold plated (ISO 4523)
Other metallic parts	: Brass (UNS C38500)	Nickel plated (FS-QQ-N-290A)
O-Rings	: Silicone (MVQ)	-

Panel cut-out



Torque for
mounting
nut : 17 Nm

Fixed socket with nut fixing ,
with keys (L) .
Series 4K , multicontact (6)

ETUDE N°

Echelle

Dessiné

06.02.06

OVU / RMO

Contrôle

06.02.06

RMO / CDE

Modif.

00

06.02.06 / OVU



LEMO

CH-1024 Ecublens

EGL.4K.306.SLA