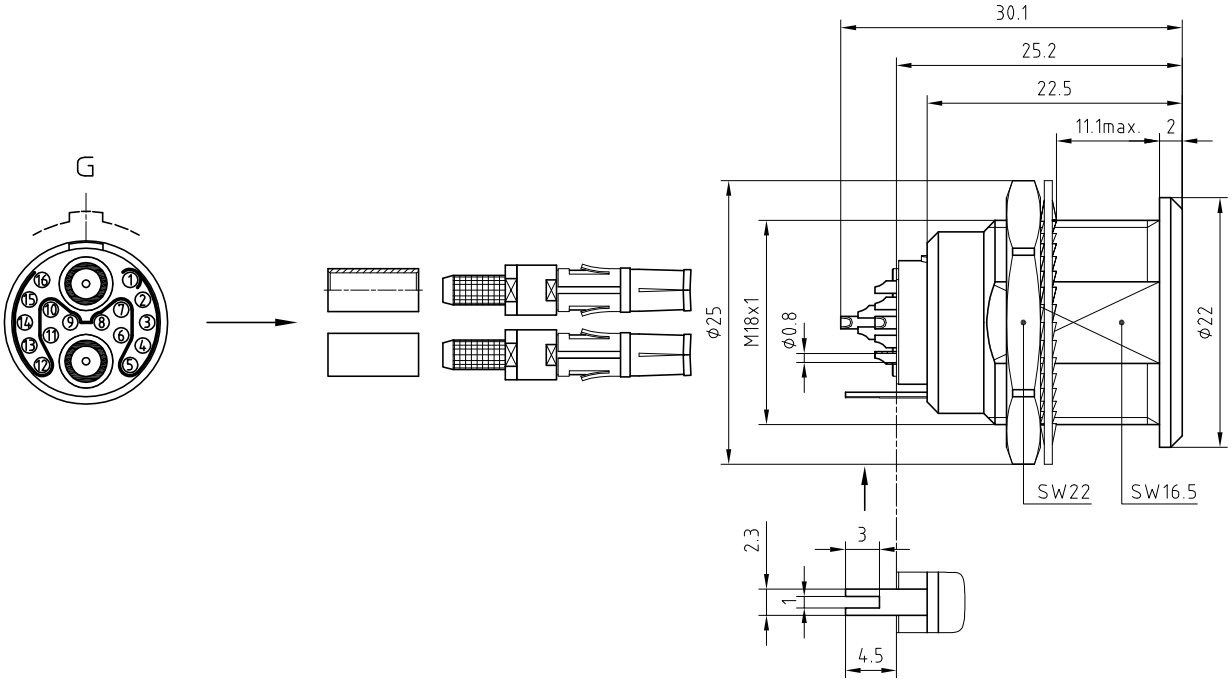

Outer shell	: Brass (UNS C38500)	Chrome plated (FS-QQ-C-320B)
Earthing crown tag	: Bronze (UNS C54400)	Gold plated (ISO 4523)
Insulator	: PEEK	-
Female contact	: Bronze (UNS C54400)	Gold plated (ISO 4523)
Locking washer	: Bronze (UNS C52100)	Nickel plated (FS-QQ-N-290A)
Other metallic parts	: Brass (UNS C38500)	Nickel plated (FS-QQ-N-290A)
Female coaxial contact	**: (PSS.2B.250.ZTME30)**	**(See customer drawing)**

Stripping dimensions

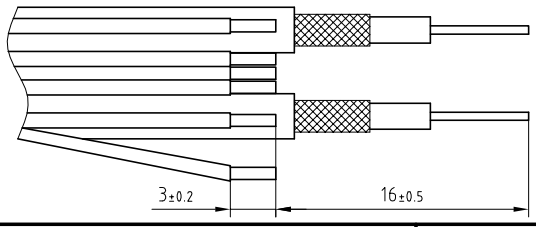

Panel cut-out



Torque for mounting nut : 9 Nm

Spanner for nut : DCA.91.282.2TN or
Spanner for nut : DCG.91.282.2TN

Fixed socket with earthing tag , nut fixing , with key (G) , (Cable group 1)
Series 3B , 2coax50 Ω(typeC)+ 16LV(ϕ0.7)

ETUDE N° E1936-B

Echelle			
—	Dessiné	14.10.2010	OVU / JPBA
	Contrôle	03.11.2010	JPBA/ATVI
	Modif.	01	03.11.2010/ OVU

LEMO SA CH-1024 Ecublens

ENG.3B.856.CLL1