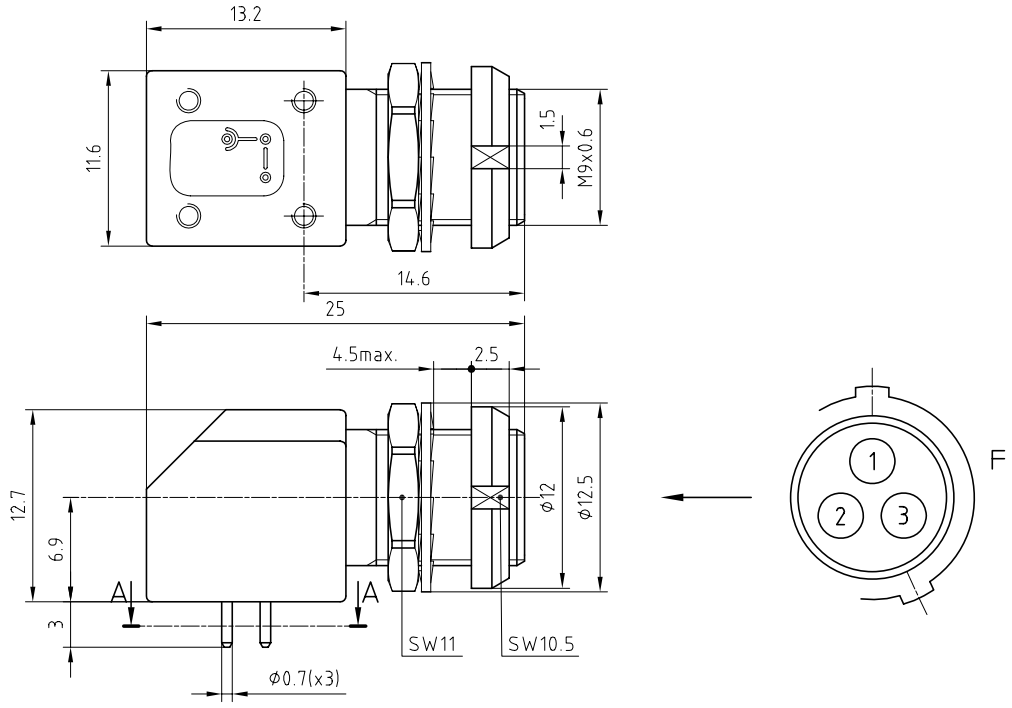

Outer shell	: Brass (UNS C38500)	Nickel plated (FS-QQ-N-290A)
Earthing crown	: Bronze (UNS C54400)	Nickel plated (FS-QQ-N-290A)
Insulator	: PEEK	-
Female contact	: Bronze (UNS C54400)	Gold plated (ISO 4523)
Locking washer	: Bronze (UNS C52100)	Nickel plated (FS-QQ-N-290A)
Other insulating parts	: PPS	-
Other metallic parts	: Brass (UNS C38500)	Nickel plated (FS-QQ-N-290A)

Panel cut-out



Torque for mounting nut : 2.5 Nm

A-A cross-section (PCB drilling pattern)

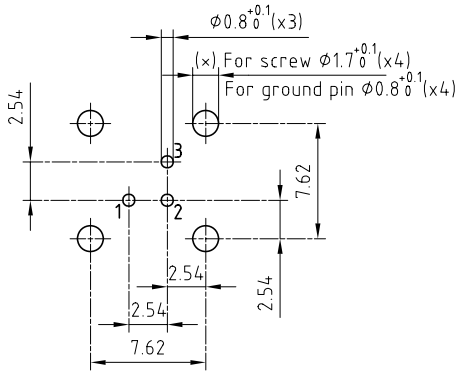

(x) For screw M1.6x0.35 tightening torque value : 6 to 7 Ncm

Spanner for notched nut : DCH.91.121.PA

Elbow socket (90°) with two nuts , with keys (F) for PCB . (Back panel mounting) . Series 0B , multipole (3) (Without screw and ground pin)

ETUDE N° E7074

Echelle —

Dessiné	30.04.07	OVU / RMO
Contrôle	30.04.07	RMO / CDE
Modif.	00	30.04.07 / OVU

LEMO SA CH-1024 Ecublens

EXF.0B.303.HLNZ