




Outer shell	: Brass (UNS C38500)	Chrome plated (FS-QQ-C-320B)
Latch sleeve	: Special brass	Nickel plated (FS-QQ-N-290A)
Collet nut	: Brass (UNS C38500)	Chrome plated (FS-QQ-C-320B)
Insulator	: PEEK	-
Male contacts	: Brass (UNS C38500)	Gold plated (ISO 27874)
Other metallic parts	: Brass (UNS C38500)	Nickel plated (FS-QQ-N-290A)
Bend relief	: Polyurethane	Various colors

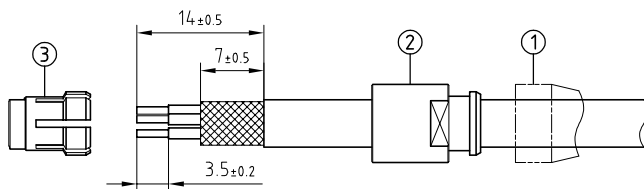


1. Strip the cable according to the given dimensions. Slide it into the bend relief ①, the collet nut ② and the collet ③.

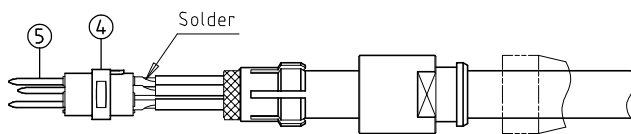

2. In case of a screened cable, fold screen back over the extremity of the collet. Arrange the conductors according to the insulator ④ marking by avoiding to twist them. Fit conductor into the contacts ⑤ and solder. Verify that insulator and insulation remain clean.

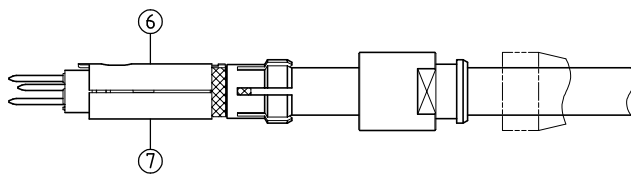

3. In case of a screened cable, check that the screen which is folded back over the collet is clear of the keyway. Locate the slotted upper half ⑥ of the split insert carrier over the shoulder and key on the insulator then align and press together the other half ⑦ to form a complete cylinder. Align the key of the insert carrier with the keyway in the collet and move them together whilst checking that the screen is being clamped around the whole circumference and cut, if necessary, the excess screen.

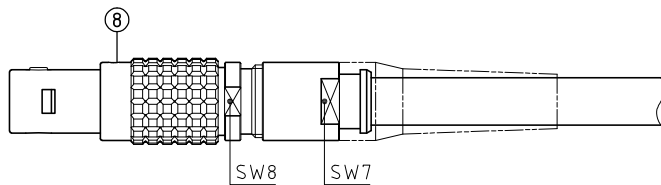

4. Next slide the plug shell ⑧ over the insulator assembly making sure that the key on the insert carrier ⑧ goes into the keyway (under the color point) inside the shell. Ensure that the internal components do not rotate in the shell and finally screw the collet nut with the appropriate tool and tighten to the maximum torque value of 0,5Nm. Slide the bend relief onto the collet nut.

Flat spanners set : DCP.91.001.TN

Straight plug, with key (G), with cable collet, and nut for bend relief, with extended contact on position 1 and 3. Series 0B, multiple (5)

ETUDE N° E7112-E11044-E10416-E6040-E7195

Echelle —	Dessiné	15.08.2006	OVU / RMO
	Contrôle	28.08.2018	NHA / ATVI
	Modif.	03	28.08.2018 / OVU



LEMO

LEMO SA
Chemin des Champs-Courbes 28
1024 Ecublens - SWITZERLAND

Tel. (+41 21) 695 16 00
email : info@lemo.com
www.lemo.com

FGG.0B.305.CLYD __ _ Z