




Outer shells	: Aluminium (AA 6262A) or (AA 6023) Anthracite nickel
Latch nut	: Aluminium (AA 6262A) or (AA 6023) Anthracite nickel
Insulator	: PEEK -
Ratchets	: PEEK-Carbon -
Grommet	: Fluorosilicone (FVMQ) Blue
Male contact	: Brass (UNS C34200) Gold plated (ISO 27874)
Clip	: Cu-Be (UNS C17200) -
Spring	: Stainless steel -
Other metallic part	: Brass (UNS C38500) Nickel plated (SAE AMS QQ N 290)

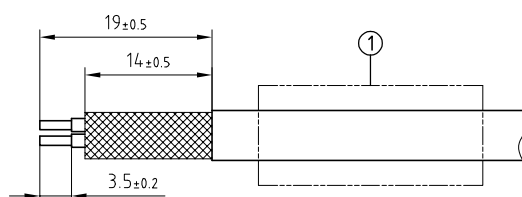


1. Strip the cable according to the given dimensions. Slide it into the heat shrink tubing ① (not furnished).

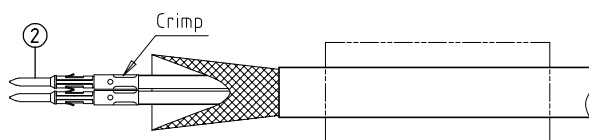

2. In case of a screened cable, widen and pull the screen all the way to the back. Fix the positioner on the crimping tool and set selector to the number corresponding to the conductor AWG as indicated on the positioner label. Fit conductor into the contacts ② and make sure it is visible through its inspection hole in the crimp barrel. Open crimping tool then push contact fully into positioner and complete one crimping cycle. Remove from crimping tool and check that conductor is secure in contact and shows in inspection hole.

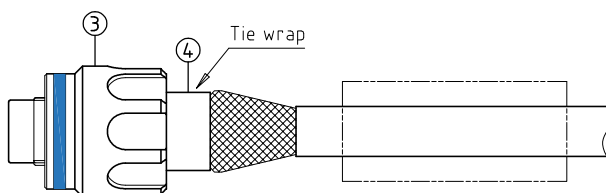

3. Slide crimped contact-conductor combinations according to the insulator marking by avoiding to twist the conductors. Introduce lightly the contacts into the insulator and verify that no conductors are crossed before pushing them completely. Check that all contacts hold in the insulator by verifying their alignment at the front of the insulator and they should remain in position when each conductor is given a gentle pull. Check that retention of the contact is correct with the recommended test tool. Bring the screen around the rear of the plug shell ③ and secure it with a band-it tie-wrap ④ (not furnished) to fix the screen in place. Cut, if necessary the excess screen.

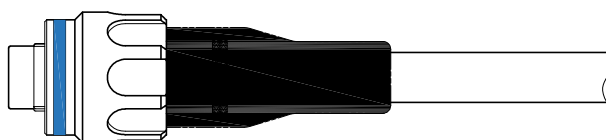

4. Slide the heat shrink tubing. With a heat gun fully shrink the tubing until it retracts.

Crimping tool	: DPC.91.701.V
Extractor	: DCF.93.090.4LT
Male contact	: FGN.0M.560.ZZC
Male positioner	: DCE.91.090.5MVC
Male retention testing tool	: DCK.91.091.4LRC

**Straight plug, with keys (N),
with arctic grip.
Series 0M, multiple (3)**

ETUDE N° E6319-E6360

Echelle	Dessiné	19.02.2020	OVU / NHA
	Contrôle	19.02.2020	NHA / CDE
	Modif.	00	19.02.2020/ OVU



LEMO

LEMO SA
Chemin des Champs-Courbes 28
1024 Ecublens - SWITZERLAND

Tel. (+41 21) 695 16 00
email : info@lemo.com
www.lemo.com

FGN.0M.303.XLC